


Testing and Inspection


INSPECT [DRIVE BELT](#)

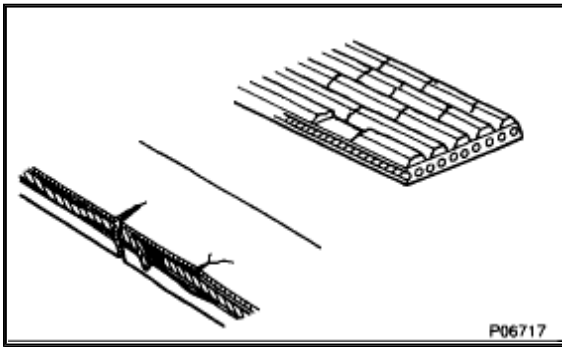

ZOOM

SIZED FOR PRINT

Visually check the [drive belt](#) for excessive wear, frayed cords, etc. If any defect has been found, replace the drive belt.

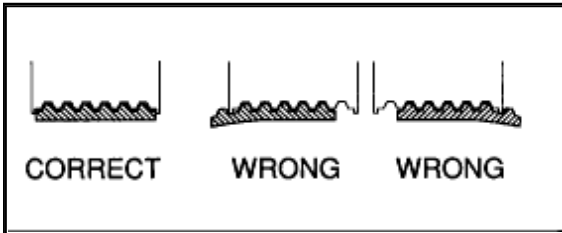

ZOOM

SIZED FOR PRINT

HINT:

- Cracks on the rib side of a belt are considered acceptable. If the missing chunks from the ribs are found on the [drive belt](#), it should be replaced.
- After installing a [drive belt](#), check that it fits properly in the ribbed grooves.
- Check with your hand to confirm that the [drive belt](#) has not slipped out of the groove on the bottom of the pulley.